



# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

169.1418

First Named Inventor or Application Identifier

CAMERON BOLITHO BROWNE, ET AL.

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514  
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	105-20 =	85	X \$ 18.00 =	\$ 1,530.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	9-3 =	6	X \$ 78.00 =	\$ 468.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
	Total of above Calculations =				\$ 3,018.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 3,018.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$3,018.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	David L. Schaeffer, RN 32,716
SIGNATURE	David L. Schaeffer
DATE	August 23, 1999

## **METHOD AND APPARATUS FOR ORIENTATING A CHARACTER STROKE**

### **Field of Invention**

5 The present invention relates to a method and apparatus for orientating a character stroke. The invention also relates to a computer program product comprising a computer readable medium including a computer program for orientating a character stroke. The invention further relates to a method and apparatus for orientating a space curve, including a computer program product therefor.

### **Background**

10 United States Patent No. 5,771,035 discloses a character generation device for producing new fonts from a basic font and paste components. The device has a shape recogniser for extracting an element of a character of the basic font and recognising its shape. The shape recogniser determines the stroke angle of the element and the paste components are superposed at the angle matching the angle of the stroke. The device  
15 allows the easy generation of characters of a font without manually designing each character. However, this device suffers from the disadvantage that it is not possible to manipulate the stored basic font, particularly the orientation of character strokes.

### **Summary of the Invention**

20 It is an object of the present invention to ameliorate one or more disadvantages of the prior art.

According to one aspect of the present invention there is provided a method of orientating a space curve, wherein the space curve has two endpoints, the method comprising the steps of: (i) selecting a desired direction; (ii) generating a first vector having a direction which is same as the selected desired direction; (iii) generating at least  
25 one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve; (iv) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and (v) orientating said  
30 direction of said space curve in accordance with said determined direction.

According to another aspect of the present invention there is provided a method of orientating a finite n-dimensional space curve, wherein the space curve has two endpoints, the method comprising the steps of: (i) selecting a desired direction in response

to user input; (ii) generating a first vector having a direction which is same as the selected desired direction; (iii) generating at least one second vector based upon the finite n-dimensional space curve; (iv) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and (v) orientating said finite n-dimensional space curve to the determined direction.

According to still another aspect of the present invention there is provided a method of orientating a character stroke, the method comprising the steps of: (i) selecting a desired direction for orientating the character stroke; (ii) generating a first vector having a direction which is same as the selected desired direction; (iii) generating a space curve representative of the character stroke, wherein the space curve has two endpoints; (iv) generating two second vectors, each connecting both said endpoints and having opposite directions; (v) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparing step comprises the sub-steps of: (v)(a) determining a first angle between one of said two second vectors and said first vector; (v)(b) determining a second angle between the other one of said two second vectors and said first vector; and (v)(c) comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction; (vi) orientating said direction of said space curve in accordance with said determined direction; and (vii) orientating the character stroke in accordance with the direction of the space curve.

According to still another aspect of the present invention there is provided apparatus for orientating a space curve, wherein the space curve has two endpoints, the apparatus comprising: selection means for selecting a desired direction; first generation means for generating a first vector having a direction which is same as the selected desired direction; means for providing a space curve; second generation means for generating at least one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve; comparing the

first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and orientation means for orientating said direction of said space curve in accordance with  
5 said determined direction.

According to still another aspect of the present invention there is provided apparatus for orientating a finite n-dimensional space curve, wherein the space curve has two endpoints, the apparatus comprising: means for selecting a desired direction in response to user input; means for generating a first vector having a direction which is  
10 same as the selected desired direction; means for providing a n-dimensional space curve; means for generating at least one second vector based upon the finite n-dimensional space curve; means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said  
15 selected desired direction; and means for orientating said finite n-dimensional space curve to the determined direction.

According to still another aspect of the present invention there is provided apparatus for orientating a character stroke, the apparatus comprising: means for selecting a desired direction for orientating the character stroke; means for generating a first vector  
20 having a direction which is same as the selected desired direction; means for generating a space curve representative of the character stroke, wherein the space curve has two; means for generating two second vectors, each connecting both said endpoints and having opposite directions; means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is  
25 along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparison means comprising: means for determining a first angle between one of said two second vectors and said first vector; means for determining a second angle between the other one of said two second vectors and said first vector; and means for comparing said first angle with said second angle;  
30 wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction; means for orientating said direction of said space curve in accordance

with said determined direction; and means for orientating the character stroke in accordance with the direction of the space curve.

According to still another aspect of the present invention there is provided a computer program product comprising a computer readable medium having a computer  
5 program for orientating a space curve, wherein the space curve has two endpoints, the computer program product comprising: selection means for selecting a desired direction; first generation means for generating a first vector having a direction which is same as the selected desired direction; means for providing a space curve; second generation means  
10 for generating at least one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve; first comparison means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and orientation means for orientating said direction of said space curve  
15 in accordance with said determined direction.

According to still another aspect of the present invention there is provided a computer program product comprising a computer readable medium including a computer  
20 program for orientating a finite n-dimensional space curve, wherein the space curve has two endpoints, the computer program product comprising: means for selecting a desired direction in response to user input; means for generating a first vector having a direction which is same as the selected desired direction; means for providing a n-dimensional space curve; means for generating at least one second vector based upon the finite n-dimensional space curve; means for comparing the first and second vectors so as to  
25 determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and means for orientating said finite n-dimensional space curve to the determined direction.

According to still another aspect of the present invention there is provided a computer program product comprising a computer readable medium including a computer  
30 program for orientating a character stroke, the computer program product comprising: means for selecting a desired direction for orientating the character stroke; means for generating a first vector having a direction which is same as the selected desired direction; means for generating a space curve representative of the character stroke, wherein the

space curve has two endpoints, means for generating two second vectors, each connecting both said endpoints and having opposite directions; means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparison means comprises: means for determining a first angle between one of said two second vectors and said first vector; means for determining a second angle between the other one of said two second vectors and said first vector; and means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction; means for orientating said direction of said space curve in accordance with said determined direction; and means for orientating the character stroke in accordance with the direction of the space curve.

#### **Brief Description of the Drawings**

Embodiments of the invention are described with reference to the drawings, in which:

Fig. 1 is a flow diagram of a method of orientating an n-dimensional finite space curve in accordance with a preferred embodiment of the invention;

Fig. 2 illustrates an example 2-dimensional curve with end points labelled;

Fig. 3 illustrates an example set of two preferred direction vectors for the 2-dimensional case;

Fig. 4 illustrates an example set of three preferred direction vectors for the 3-dimensional case;

Figs. 5A and 5B illustrate vectorial relationships between the curve end points;

Figs. 6A and 6B illustrate the relationship between end point vectors and the preferred direction vector;

Figs. 7A to 7F illustrate the special case of ambiguous orientation and its solution using the second preferred direction vector;

Fig. 8 illustrates the special case of coincident start and end points for a closed curve;

Fig. 9 illustrates a variety of 2-dimensional curves oriented to various preferred directions;

Fig. 10 illustrates an example 2-dimensional curve with end points and end tangent directions shown;

Fig. 11 illustrates an example preferred direction vector for the 2-dimensional case;

5 Figs. 12A and 12B illustrate the relationship between end tangent vectors and the preferred direction vector;

Fig. 13 illustrates the special example of parallel end tangent vectors;

Figs. 14A to 14D illustrate a solution to the problem shown in Fig. 12 based on end point position;

10 Figs. 15A to 15F illustrate the resolution of the ambiguous end point case using a second preferred direction;

Fig. 16 illustrates the special case of coincident start and end points for a closed curve;

15 Fig. 17 illustrates a variety of 2-dimensional curves oriented to various preferred directions; and

Fig. 18 is a block diagram of a general purpose computer with which the embodiments can be implemented;

### Detailed Description

20 Where reference is made in any one or more of the drawings to steps and/or features which have the same reference numerals, those steps and/or features are for the purposes of the description the same, unless the contrary appears.

The principles of the preferred method have general applicability to n-dimensional finite space curves. However, for ease of explanation, 2-dimensional examples are also described, in particular the orientation of 2-dimensional curves that  
25 describe the paths of stroke-based typeface characters. It is not intended that the present invention be limited to these 2-dimensional examples. The preferred method can have application for generating and/or modifying typefaces, fonts, or characters suitable for display or printing but is not specifically limited thereto.

30 Some portions of the detailed descriptions which follow are explicitly or implicitly presented in terms of algorithms and symbolic representations of operations on data within a computer memory. These algorithmic descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. An algorithm is here, and generally,



conceived to be a self-consistent sequence of steps leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven  
5 convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

It should be borne in mind, however, that all of these and similar terms, such as space curves, are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as  
10 apparent from the following discussions, it is appreciated that throughout the present invention, discussions utilizing terms such as “selecting”, “determining”, “generating”, “providing”, “comparing”, “orientating” or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers  
15 and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

The present invention also relates to apparatus for performing the operations herein. This apparatus may be specially constructed for the required purposes, or it may comprise  
20 a general purpose computer selectively activated or reconfigured by a computer program stored in the computer. The algorithms and displays presented herein are not inherently related to any particular computer or other apparatus. Various general purpose machines may be used with programs in accordance with the teachings herein, or it may prove convenient to construct more specialized apparatus to perform the required method steps.  
25 The structure of a conventional general purpose computer will appear from the description below.

In addition, the present invention also relates to a computer program product comprising a computer readable medium including a computer program for orientating a space curve. The computer readable medium is taken herein to include any transmission  
30 medium for transmitting the computer program between a source and a designation. The transmission medium may include storage devices such as magnetic or optical disks, memory chips, or other storage devices suitable for interfacing with a general purpose computer. The transmission medium may also include a hard-wired medium such as

exemplified in the Internet system, or wireless medium such as exemplified in the GSM mobile telephone system. The computer program is not described with reference to any particular programming language and implementation thereof. It will be appreciated that a variety of programming languages and implementations thereof may be used to

5 implement the teachings of the invention as described herein.

Fig. 1 is a flow diagram of a method of orientating a n-dimensional finite space curve in accordance with a preferred embodiment of the invention. The preferred method allows orientation of a space curve in a simple and consistent manner with limited user input. The method commences at step 102 and any necessary processes and parameters  
10 are initialized. In the next step 104, the user selects a preferred direction for orientating the n-dimensional finite curve space. Alternatively, the preferred direction may be preset. The processing continues at the next step 106, where a preferred vector is generated having the same direction as the preferred direction. Also during this step, n-1 additional preferred vectors are generated from the preferred direction supplied by the user. Each of  
15 these additional preferred vectors is non-zero and is linearly independent of the other preferred vectors, thus forming a basis. Alternatively, the user may input each desired direction of these additional preferred vectors. In this way, any ambiguous result of orientating the space curve can be resolved. In the next step 108, an n-dimensional finite space curve is provided, which may be accessed from memory or may be implicitly  
20 generated. This n-dimensional space curve may be derived from the shape of a character. The processing continues at the next step 110, where one or more vector(s) based upon a characteristic of the space curve are generated. Preferably, the method automatically generates these vector(s) of the space curve according to a predetermined technique. Alternatively, the method can include a step (not shown) whereby a user is able to select  
25 the desired technique for generating the vector(s) of the space curve. These techniques and some typical examples of vectors of space curves are given in the examples described below. In the next step 112, a comparison is made between one or two vectors of space curves and the initial preferred vector to determine that direction of the space curve closest to the desired direction. If both vectors of the space curves are equally close then  
30 the additional preferred vectors are utilized to resolve the ambiguity. In step 114, the n-dimensional finite space curve is then orientated to that direction determined by step 112. During this step, the corresponding character can also be orientated in the same direction. In the decision box 116, a check is made whether any more space curves are to be

processed. If the decision box returns true, the processing continues at step 108. Otherwise, the processing terminates at step 118. For a more detailed explanation of the preferred method reference is made to the following examples.

Example(s)

Turning initially to Fig. 2, there is shown a sample 2-dimensional space curve describing the stroke path 21 of the character "S". Two end points A 22 and B 23 have been labelled, and the curve is not oriented at this stage. The end points are selected such that all points along the curve lie within the interval formed by these end points. This 2-dimensional curve is derived from a complex character shape "S". Any of the known processes for obtaining the stroke path from the character shape would be suitable. This complex character shape may be stored in memory for processing by the preferred method. Alternatively, the complex character shape may be implicitly generated.

Turning to Fig. 3, there is shown the "preferred vector" v1 31 that describes an angle theta 32 with the X-axis. The angle theta is supplied by the user as a single continuous-value parameter, and controls the overall orientation that is enforced on the set of curves to be oriented. A "second preferred vector" v2 33 is calculated relative to v1 such that it is orthogonal to v1 and lies in the 2-dimensional plane occupied by the set of curves to be oriented. The second preferred vector is used to resolve cases where the preferred vector yields an ambiguous solution. The direction of orthogonality (left orthogonal or right orthogonal in the 2-dimensional case) is not important provided that the same convention is used consistently. Note that if the second preferred vector is non-zero and linearly independent of the preferred vector, then ambiguity resolution is guaranteed. Alternatively, other types of non-zero linearly independent vectors may be used instead of orthogonal vectors.

For the general case of n-dimensional curves, n-1 additional preferred vectors are calculated from the initial preferred vector provided by the user, such that each successive preferred vector is non-zero and linearly independent of preceding preferred vectors, forming a basis.

For instance, Fig 4 shows a preferred vector set for a 3-dimensional example. There is shown v1 41, the initial preferred vector nominated by the user, v2 42 the second preferred vector that is orthogonal to v1, and v3 43 the third preferred vector that is orthogonal to both v1 and v2 44. The second preferred vector is used to resolve cases where the preferred vector gives an ambiguous solution, and the third preferred vector is

used to resolve cases where the preferred and second preferred vectors both give ambiguous results. This chain of ambiguity resolution can be extended to  $n$  preferred vectors in  $n$ -dimensions as required. The preferred vectors need not be orthogonal to previous preferred vectors, but must be non-zero and linearly independent of previous preferred vectors. Any number of vectors may be specified (either linearly dependent or independent) provided that this set includes at least  $n$  linearly independent vectors.

Referring to Figs. 5A and 5B, there are illustrated two arrangements of the planar figure 21 based upon its end points A 22 and B 23 (Fig. 2). The first arrangement (Fig. 5A) shows the end points related by the vector BA 51, and the second arrangement (Fig. 5B) shows the end points related by the vector AB 52. This is one way to derive the "characteristic vector" based upon the curve's characteristics, and its "matching" vector, which in this case is co-linear with and in an opposite direction to the characteristic vector. Any process that describes the curve in terms of a single characteristic vector may be applied, for instance integrating the curve to obtain the average direction vector.

Turning now to Figs. 6A and 6B, there are shown the angles alpha 61 and beta 62 given by the acute angle between vectors BA and  $v_1$ , and vectors AB and  $v_1$  respectively. The relative magnitudes of angles alpha and beta define the final orientation of the curve, and can be conveniently calculated as the dot product of the vector pairs. If the magnitude of alpha is less than the magnitude of beta then the curve is described as being oriented "from B to A", and if the magnitude of alpha is greater than the magnitude of beta then the curve is described as being oriented "from A to B". Alternatively, the magnitude of alpha can be compared against a threshold of  $90^\circ$ . If alpha is less than  $90^\circ$  the direction of the curve is "from B to A". If alpha is greater than the  $90^\circ$  threshold then the direction of the curve is "from A to B".

In the case that alpha and beta are of equal magnitude (the dot product is 0 in both cases), then the second preferred vector  $v_2$  can be used to resolve this ambiguity, as shown in Figs. 7A to 7F. The end points of the 2-dimensional curve 70 are related by the vectors DC 71 and CD 72, but the acute angles alpha 74 and beta 75 formed by these vectors and the preferred vector  $v_1$  are identical (both give a dot product of 0). The second preferred vector  $v_2$  is now used as follows. The acute angles gamma 76 and delta 77 formed by the vectors DC and CD and  $v_2$  are calculated, and their relative magnitude is used to determine the curve's orientation in a manner similar to the comparison between alpha and beta. That is, if the magnitude of gamma is less than the magnitude of delta

then the curve is described as being oriented "from D to C", and if the magnitude of gamma is greater than the magnitude of delta then the curve is described as being oriented "from C to D". For the 2-dimensional case, if alpha and beta are of equal magnitude then it is not possible for gamma and delta to also be of equal magnitude. Alternatively, the magnitude of gamma can be compared against a threshold of  $90^\circ$ . If gamma is less than  $90^\circ$  the direction of the curve is "from D to C". If gamma is greater than the  $90^\circ$  threshold then the direction of the curve is "from C to D".

For the general case of an n-dimensional curve, the coordinates of the difference vector AB in the basis formed by the set of linearly independent preferred vectors is non zero when A is not equal to B. Here, the process is to choose the orientation "from A to B" if the first non-zero coordinate is positive, and choose the orientation "from B to A" if the first non-zero coordinate is negative. It is not possible for all n linearly dependent preferred vector comparisons to be ambiguous.

Turning now to Fig. 8, there is shown a closed curve 81, a special case of a finite curve with no clearly defined start or end point. In this instance, either it can be decided that the orientation process applies only to open curves, or a second non-ambiguous technique can be chosen to deal with this case. One example of such a non-ambiguous technique follows.

Given that the only restriction on end points is that all curve points must lie within the interval described by them, then any point on the closed curve may be chosen such that the start point A and end point B are coincident at this chosen point 82. Given no other criteria, it is sensible to choose this coincident start/end position as a point on the curve whose outward normal is most similar to the preferred vector v1 83. Alternatively, the point to be nominated as the coincident start/end point may be chosen randomly along the curve interval, pseudo-randomly for reproducibility, or according to some other relevant criteria. The vectors AB and BA are in fact NULL and have no length or direction. Consequently, alternative vectors AB' 84 and BA' 85 can be defined tangent to the curve at point A/B and heading in opposite directions. Once AB' and BA' have been defined, the same process as previously described for determining orientation in the non-closed case applies. Note that in this particular example, AB' and BA' are perpendicular to the preferred vector v1, so the second preferred vector v2 will be the deciding vector here.

Turning now to Fig. 9, there are shown five different sets of stroke curves. The first curve set 900 to 905 illustrates a group of complex curves representing the character "S". The second curve set 910 to 915 illustrates a single curve of the character "S". The third curve set 920 to 925 represents an asterisk-like character. The fourth curve set 930 to 935 represents a group of complex curves representing the character "I". The fifth curve set 940 to 945 represents a group of complex curves representing the character "Q". Also shown is the direction of the preferred vector  $v_1$  measured in degrees (950 to 955) in an anti-clockwise direction from the "9 o'clock" position. The direction of each of the stroke curves of Fig. 9 are shown for each direction of the preferred vector utilising the method described with reference to Figs. 5A to 7F.

#### Further Examples

Turning initially to Fig. 10, there is shown a sample 2-dimensional curve describing the path of the character "S" 101. Two end points A 102 and B 103 have been labelled, and the curve is not oriented at this stage. The end points are selected such that all points along the curve lie within the interval formed by these end points. The outwardly directed end tangent associated with end point A,  $T_a$  104, and the outwardly directed end tangent associated with end point B,  $T_b$  105, are also shown. The tangent direction at end points can be calculated by standard mathematical techniques. This is only one way in which the dual "characteristic vectors"  $T_a$  and  $T_b$  may be calculated. Any process that describes the curve in terms of a dual characteristic vector pair may be applied, for instance integrating the curve to obtain the weighted average direction vector relative to each end.

Turning to Fig. 11, there is shown the "preferred vector"  $v_1$  111 that describes an angle  $\theta$  112 with the X-axis. The angle  $\theta$  is supplied by the user as a single continuous-value parameter, and controls the overall orientation that is enforced on the set of curves to be oriented.

Referring to Figs. 12A and 12B, there are shown the angles  $\alpha$  121 and  $\beta$  122 given by the acute angle between vectors  $T_a$  and  $v_1$ , and vectors  $T_b$  and  $v_1$  respectively. The relative magnitudes of angles  $\alpha$  and  $\beta$  define the final orientation of the curve, and can be conveniently calculated as the dot product of the vector pairs. If the magnitude of  $\alpha$  is less than the magnitude of  $\beta$  then the curve is described as being oriented "from B to A", and if the magnitude of  $\alpha$  is greater than the magnitude of  $\beta$  then the curve is described as being oriented "from A to B".

Turning now to Fig. 13, there is shown the special case 131 where alpha and beta are of equal magnitude (end tangent vectors Ta 132 and Tb 133 are parallel). An additional technique can be used to resolve this ambiguity, similar to that described with reference to and illustrated in Figs. 5A and 5B. This technique is described in more detail with reference to Figs. 14A to 14D. The end points A 141 and B 142 of the 2-dimensional curve 140 are connected by the vectors AB 143 and BA 144. The angles alpha 146 and beta 147 are given by the acute angle between vectors AB and v1, and vectors BA and v1 respectively. If the magnitude of alpha is less than the magnitude of beta then the curve is described as being oriented "from B to A", and if the magnitude of alpha is greater than the magnitude of beta then the curve is described as being oriented "from A to B". Alternatively, the magnitude of alpha can be compared against a threshold of 90°. If alpha is less than 90° the direction of the curve is "from B to A". If alpha is greater than the 90° threshold then the direction of the curve is "from A to B".

Illustrated in Figs. 15A to 15F is the case where alpha 146 and beta 147, of the previous example (Figs. 14C and 14D), are identical (both give a dot product of 0). In this case, both alpha 146 and beta 147 are right angles. A "second preferred vector" v2 150 is used to solve the ambiguity. The second preferred vector v2 150 is selected relative to v1 145 such that it is non-zero and linearly independent of v1 and lies in the 2-dimensional plane occupied by the curve 140. The second preferred vector v2 is used to resolve cases where the preferred vector v1 yields an ambiguous solution. For convenience, v2 is defined to be orthogonal to v1 where direction of orthogonality (left orthogonal or right orthogonal in the 2-dimensional case) is not important provided that the same convention is used consistently. Note that if the second preferred vector is non-zero and linearly independent of the preferred vector, then ambiguity resolution is guaranteed. The second preferred vector v2 150 is used as follows. The angles gamma 151 and delta 152 formed by the vectors AB and BA and v2 are calculated, and their relative magnitude is used to determine the curve's orientation similar to the comparison between alpha and beta. That is, if the magnitude of gamma  $\gamma$  is less than the magnitude of delta then the curve is described as being orientated "from B to A", and if the magnitude of gamma  $\gamma$  is greater than the magnitude of delta, then the curve is described as being orientated "from A to B". For the 2-dimensional case, if alpha and beta are equal in magnitude then it is not possible for gamma and delta to also be of equal magnitude. Alternatively, the magnitude of gamma can be compared against a threshold of 90°. If

gamma is less than  $90^\circ$  the direction of the curve is "from B to A". If gamma is greater than the  $90^\circ$  threshold then the direction of the curve is "from A to B".

Turning now to Fig. 16, there is shown a closed curve 161, a special case of a finite curve with no clearly defined start or end point. In this instance, either it can be  
5 decided that the orientation process applies only to open curves, or a second non-ambiguous technique can be chosen to deal with this case. One example of such a non-ambiguous technique follows.

Given that the only restriction on end points is that all curve points must lie within the interval described by them, then any point on the closed curve may be chosen  
10 such that the start point A and end point B are coincident at this chosen point 162. Given no other criteria, it is sensible to choose this coincident start/end position as a point on the curve whose outward normal is most similar to the preferred vector v1 163. Alternatively, the point to be nominated as the coincident start/end point may be chosen randomly along the curve interval, pseudorandomly for reproducibility, or according to  
15 some other relevant criteria. The end tangent vectors Ta 165 and Tb 166 are calculated, and the same process as previously described for determining orientation in the non-closed case applies. Note that in this particular example, Ta and Tb are perpendicular to the preferred vector v1, so the second preferred vector v2 will be the deciding vector here.

Referring to Fig. 17, there are shown a variety of character shapes described by  
20 2-dimensional stroke paths similar to that shown in Fig. 9. However, in this case, the direction of the preferred vector v1 is measured anti-clockwise from a "3 o'clock" position. Furthermore, the method utilised for orientating the stroke curves is that described with reference to Figs. 11 to 15F.

If a curve to be oriented is already in an oriented format (that is, it occupies a  
25 monotonically increasing interval) then either:

- a) the original direction can be retained, or
- b) the curve can be reoriented,

depending on the outcome of the orientation process. If the curve is to be reoriented, this can in general be achieved by relabelling the end points, reversing or reparameterising the  
30 curve along its interval, or performing whatever action is relevant to the curve's specific format.

#### **Preferred Embodiment of Apparatus(s)**



The preferred method is preferably practiced using a conventional general-purpose computer, such as the one shown in Fig. 18, wherein the processes of Figs. 1 to 17 may be implemented as software executing on the computer. In particular, the steps of the method are effected by instructions in the software that are carried out by the computer. The software may be divided into two separate parts; one part for carrying out the orientation method; and another part to manage the user interface between the latter and the user. The software may be stored in a computer readable medium, including the storage devices described below, for example. The software is loaded into the computer from the computer readable medium, and then executed by the computer. A computer readable medium having such software or computer program recorded on it is a computer program product. The use of the computer program product in the computer preferably effects an advantageous apparatus for orientating a character stroke or n-dimensional finite space curves in accordance with the embodiments of the invention.

The computer system 1800 consists of the computer 1802, a video display 1816, and input devices 1818, 1820. In addition, the computer system 1800 can have any of a number of other output devices including line printers, laser printers, plotters, and other reproduction devices connected to the computer 1802. The computer system 1800 can be connected to one or more other computers via a communication interface using an appropriate communication channel such as a modem communications path, a computer network, or the like. The computer network may include a local area network (LAN), a wide area network (WAN), an Intranet, and/or the Internet

The computer 1802 itself consists of a central processing unit(s) (simply referred to as a processor hereinafter) 1804, a memory 1806 which may include random access memory (RAM) and read-only memory (ROM), input/output (IO) interfaces 1808, a video interface 1810, and one or more storage devices generally represented by a block 1812 in Fig. 1. The storage device(s) 1812 can consist of one or more of the following: a floppy disc, a hard disc drive, a magneto-optical disc drive, CD-ROM, magnetic tape or any other of a number of non-volatile storage devices well known to those skilled in the art. Each of the components 1804 to 1812 is typically connected to one or more of the other devices via a bus 1814 that in turn can consist of data, address, and control buses.

The video interface 1810 is connected to the video display 1816 and provides video signals from the computer 1802 for display on the video display 1816. User input to operate the computer 1802 can be provided by one or more input devices 1808. For

example, an operator can use the keyboard 1818 and/or a pointing device such as the mouse 1820 to provide input to the computer 1802.

The system 1800 is simply provided for illustrative purposes and other configurations can be employed without departing from the scope and spirit of the invention. Exemplary computers on which the embodiment can be practiced include IBM-PC/ATs or compatibles, one of the Macintosh (TM) family of PCs, Sun Sparcstation (TM), or the like. The foregoing are merely exemplary of the types of computers with which the embodiments of the invention may be practiced. Typically, the processes of the embodiments, described hereinafter, are resident as software or a program recorded on a hard disk drive (generally depicted as block 1812 in Fig. 18) as the computer readable medium, and read and controlled using the processor 1804. Intermediate storage of the program and pixel data and any data fetched from the network may be accomplished using the semiconductor memory 1806, possibly in concert with the hard disk drive 1812.

In some instances, the program may be supplied to the user encoded on a CD-ROM or a floppy disk (both generally depicted by block 1812), or alternatively could be read by the user from the network via a modem device connected to the computer, for example. Still further, the software can also be loaded into the computer system 1800 from other computer readable medium including magnetic tape, a ROM or integrated circuit, a magneto-optical disk, a radio or infra-red transmission channel between the computer and another device, a computer readable card such as a PCMCIA card, and the Internet and Intranets including email transmissions and information recorded on websites and the like. The foregoing are merely exemplary of relevant computer readable mediums. Other computer readable mediums may be practiced without departing from the scope and spirit of the invention.

The preferred method of orientation may alternatively be implemented in dedicated hardware such as one or more integrated circuits performing the functions or sub functions of the steps of the method. Such dedicated hardware may include graphic processors, digital signal processors, or one or more microprocessors and associated memories.

### **Industrial Applicability**

The preferred embodiments are general purpose tools and may find applications in many computer graphic process(es). For example, the preferred embodiments may be used in character recognition for stroke-based fonts; evaluation of validity or artistic merit

of stroke-base fonts; computerised aids for teaching calligraphic techniques; and application of artistic effects to objects described by arbitrary space curves. Curve orientation is especially important in the area of calligraphy, where incorrectly strokes are easily recognised and indicative of poor technique. The present embodiment(s) may be  
5 used to strictly enforce stroke orientation rules intuitively used by artists in the creation of calligraphic designs or similar decorative curve-based artwork on computers.

The foregoing only describes a small number of embodiments of the present invention, however, modifications and/or changes can be made thereto by a person skilled in the art without departing from the scope and spirit of the invention.

646680

CLAIMS:

1 / A method of orientating a space curve, wherein the space curve has two endpoints, the method comprising the steps of:

- 5 (i) selecting a desired direction;
- (ii) generating a first vector having a direction which is same as the selected desired direction;
- (iii) generating at least one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve;
- 10 (iv) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and
- (v) orientating said direction of said space curve in accordance with said
- 15 determined direction.

2. A method as claimed in claim 1, wherein said step (iii) comprises the substeps of:

- (iii)(a) determining said endpoints of said space curve; and
- 20 (iii)(b) generating one said second vector connecting both said endpoints.

3. A method as claimed in claim 1, wherein said step (iii) comprises the substeps of:

- (iii)(a) determining said endpoints of said space curve; and
- 25 (iii)(b) generating two said second vectors, each connecting both said endpoints and having opposite directions.

4. A method as claimed in claim 3, wherein said comparing step (iv) comprises the sub-steps of;

- 30 (iv)(a) determining a first angle between one of said second vectors and said first vector;
- (iv)(b) determining a second angle between the other one of said second vectors and said first vector;

(iv)(c) comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction.

5. A method as claimed in claim 2, wherein said comparing step (iv) comprises the sub-steps of:

(iv)(a) determining a first angle between said first vector and said second vector;

(iv)(b) comparing said first angle with a first threshold value; wherein if said first angle is less than said first threshold value then the determined direction of the space curve is in a first direction, and if said first angle is greater than said first threshold value then the determined direction of the space curve is in a second direction, opposite the first direction.

6. A method as claimed in claim 5, wherein said first threshold value is  $90^\circ$ .

7. A method as claimed in claim 4, wherein said method further comprises the step of generating a vector orthogonal to said first vector.

8. A method as claimed in claim 5, wherein said method further comprises the step of generating a vector orthogonal to said first vector.

9. A method as claimed in claim 7 or 8, wherein said orthogonal vector is generated in a predetermined manner.

10. A method as claimed in claim 7 or 8, wherein said orthogonal vector is generated in accordance with a user selected direction.

11. A method as claimed in claim 7, wherein, if said first angle equals said second angle, the comparing step (iv) further comprises the sub-steps of:

(iv)(d) determining a third angle between one of said second vectors and said orthogonal vector;

(iv)(e) determining a fourth angle between the other one of said second vectors and said orthogonal vector;

(iv)(f) comparing said third angle with said fourth angle, wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

12. A method as claimed in claim 8, wherein, if said first angle equals said first threshold value, the comparing step (iv) further comprises the sub-steps of:

(iv)(c) determining a second angle between said second vector and said orthogonal vector;

(iv)(d) comparing said second angle with a second threshold value; wherein if said second angle is less than said second threshold value then the determined direction of the space curve is in a third direction, and if said second angle is greater than said second threshold value then the determined direction of the space curve is in a fourth direction, opposite the third direction.

13. A method as claimed in claim 12, wherein said second threshold value is 90°.

14. A method as claimed in claim 1, wherein said step (iii) comprises the substeps of:

(iii)(a) determining endpoints of said curve; and

(iii)(b) generating, at each said endpoint, a said second vector tangent to said curve.

15. A method as claimed in claim 14, wherein said comparing step (iv) comprises the sub-steps of;

(iv)(a) determining a first angle between one of said second vectors and said first vector;

(iv)(b) determining a second angle between the other one of said second vectors and said first vector;

(iv)(c) comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction.

16. A method as claimed in claim 15, wherein said step (iii) further comprises the substeps of:

(iii)(c) generating one said third vector connecting both said endpoints.

17. A method as claimed in claim 15, wherein said step (iii) further comprises the substeps of:

(iii)(c) generating two said third vectors, each connecting both said endpoints and having opposite directions.

18. A method as claimed in claim 17, wherein said comparing step (iv) further comprises the sub-steps of;

(iv)(d) determining a third angle between one of said third vectors and said first vector;

(iv)(e) determining a fourth angle between the other one of said third vectors and said first vector;

(iv)(f) comparing said third angle with said fourth angle; wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

19. A method as claimed in claim 16, wherein said comparing step (iv) comprises the sub-steps of:

(iv)(d) determining a third angle between said third vector and said first vector;

(iv)(e) comparing said third angle with a first threshold value; wherein if said third angle is less than said first threshold value then the determined direction of the space curve is in a third direction, and if said third angle is greater than said first threshold value

then the determined direction of the space curve is in a fourth direction, opposite the third direction.

20. A method as claimed in claim 19, wherein said first threshold value is  
5 90°.

21. A method as claimed in claim 18, wherein said step (iii) comprises the substep  
of:

(iii)(a) generating a vector orthogonal to said first vector.

22. A method as claimed in claim 19, wherein said step (iii) comprises the substep  
of:

(iii)(a) generating a vector orthogonal to said first vector.

23. A method as claimed in claim 21 or 22, wherein said orthogonal vector is  
15 generated in a predetermined manner.

24. A method as claimed in claim 21 or 22, wherein said orthogonal vector is  
generated in accordance with a user selected direction.

25. A method as claimed in claim 21, wherein, if said third angle equals said fourth  
angle, the comparing step further comprises the following sub-steps:

(iv)(g) determining a fifth angle between said first one of said third vectors and  
said orthogonal vector;

25 (iv)(h) determining a sixth angle between said other one of said third vectors  
and said orthogonal vector;

(iv)(i) comparing said fifth angle with said sixth angle, wherein if said fifth  
angle is less than said sixth angle then the determined direction of the space curve is in a  
fifth direction, and if said fifth angle is greater than said sixth angle then the determined  
30 direction of the space curve is in a sixth direction, opposite the fifth direction.

26. A method as claimed in claim 22, wherein, if said third angle equals said first  
threshold value, the comparing step (iv) comprises the following sub-steps:



(iv)(f) determining a fourth angle between said third vector and said orthogonal vector;

(iv)(g) comparing said fourth angle with a second threshold value; wherein if said fourth angle is less than said second threshold value then the determined direction of the space curve is in a fourth direction, and if said fourth angle is greater than said second threshold value then the determined direction of the space curve is in a fifth direction, opposite the fourth direction.

27. A method as claimed in claim 26, wherein said second threshold value is 90°.

28. A method as claimed in claim 1, wherein the method comprises the step of providing further space curves and performing the steps (iii) to (v) on each space curve.

29. A method as claimed in claim 1, wherein the method comprises a plurality of techniques for generating the second vectors and a step for selecting one of said techniques in response to user input.

30. A method of orientating a finite n-dimensional space curve, wherein the space curve has two endpoints, the method comprising the steps of:

- (i) selecting a desired direction in response to user input;
- (ii) generating a first vector having a direction which is same as the selected desired direction;

(iii) generating at least one second vector based upon the finite n-dimensional space curve;

(iv) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and

(v) orientating said finite n-dimensional space curve to the determined direction.

31. A method of orientating a character stroke, the method comprising the steps of:

(i) selecting a desired direction for orientating the character stroke;  
(ii) generating a first vector having a direction which is same as the selected desired direction;

(iii) generating a space curve representative of the character stroke, wherein  
5 the space curve has two endpoints;

(iv) generating two second vectors, each connecting both said endpoints and having opposite directions;

(v) comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said  
10 curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparing step comprises the sub-steps of:

(v)(a) determining a first angle between one of said two second vectors and said first vector;

(v)(b) determining a second angle between the other one of said  
15 two second vectors and said first vector; and

(v)(c) comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first  
20 direction;

(vi) orientating said direction of said space curve in accordance with said determined direction; and

(vii) orientating the character stroke in accordance with the direction of the space curve.

25

32. Apparatus for orientating a space curve, wherein the space curve has two endpoints, the apparatus comprising:

selection means for selecting a desired direction;

first generation means for generating a first vector having a direction which is  
30 same as the selected desired direction;

means for providing a space curve;

second generation means for generating at least one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve;

5 comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and

orientation means for orientating said direction of said space curve in accordance with said determined direction.

10

33. Apparatus claimed in claim 32, wherein said second generation means comprises:

means for determining said endpoints of said space curve; and

means for generating one said second vector connecting both said endpoints.

15

34. Apparatus as claimed in claim 32, wherein said second generating means comprises:

means for determining said endpoints of said space curve; and

20 means for generating two said second vectors, each connecting both said endpoints and having opposite directions.

35. Apparatus as claimed in claim 34, wherein said first comparison means comprises:

25 means for determining a first angle between one of said second vectors and said first vector;

means for determining a second angle between the other one of said second vectors and said first vector;

30 means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction.

36. Apparatus as claimed in claim 33, wherein said first comparison means comprises:

means for determining a first angle between said first vector and said second vector;

5 means for comparing said first angle with a first threshold value; wherein if said first angle is less than said first threshold value then the determined direction of the space curve is in a first direction, and if said first angle is greater than said first threshold value then the determined direction of the space curve is in a second direction, opposite the first direction.

10 37. Apparatus as claimed in claim 36, wherein said first threshold value is  $90^\circ$ .

38. Apparatus as claimed in claim 35, wherein said apparatus further comprises means for generating a vector orthogonal to said first vector.

15 39. Apparatus as claimed in claim 36, wherein said apparatus further comprises means for generating a vector orthogonal to said first vector.

20 40. Apparatus as claimed in claim 38 or 39, wherein said orthogonal vector is generated in a predetermined manner.

41. Apparatus as claimed in claim 38 or 39, wherein said orthogonal vector is generated in accordance with a user selected direction.

25 42. Apparatus as claimed in claim 38, wherein the first comparison means further comprises:

means for determining a third angle between one of said second vectors and said orthogonal vector;

30 means for determining a fourth angle between the other one of said second vectors and said orthogonal vector;

means for comparing said third angle with said fourth angle, wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a

third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

43. Apparatus as claimed in claim 39, wherein the first comparison means further  
5 comprises:

means for determining a second angle between said second vector and said orthogonal vector;

means for comparing said second angle with a second threshold value; wherein if said second angle is less than said second threshold value then the determined direction of  
10 the space curve is in a third direction, and if said second angle is greater than said second threshold value then the determined direction of the space curve is in a fourth direction, opposite the third direction.

44. Apparatus as claimed in claim 43, wherein said second threshold value is  
15 90°.

45. Apparatus as claimed in claim 32, wherein said second generation means comprises:

means for determining endpoints of said curve; and

20 means for generating, at each said endpoint, a said second vector tangent to said curve.

46. Apparatus as claimed in claim 45, wherein said first comparison means comprises

25 means for determining a first angle between one of said second vectors and said first vector;

means for determining a second angle between the other one of said second vectors and said first vector;

30 means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction.

47. Apparatus as claimed in claim 46, wherein said second generation means comprises:

means for generating one said third vector connecting both said endpoints.

5

48. Apparatus as claimed in claim 46, wherein said second generation means further comprises:

means for generating two said third vectors, each connecting both said endpoints and having opposite directions.

10

49. Apparatus as claimed in claim 48, wherein said first comparison means further comprises:

means for determining a third angle between one of said third vectors and said first vector;

15

means for determining a fourth angle between the other one of said third vectors and said first vector;

means for comparing said third angle with said fourth angle; wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

20

50. Apparatus as claimed in claim 47, wherein said first comparison means comprises:

means for determining a third angle between said third vector and said first vector;

25

means for comparing said third angle with a first threshold value; wherein if said third angle is less than said first threshold value then the determined direction of the space curve is in a third direction, and if said third angle is greater than said first threshold value then the determined direction of the space curve is in a fourth direction, opposite the third direction.

30

51. Apparatus as claimed in claim 50, wherein said first threshold value is 90°.

52. Apparatus as claimed in claim 49, wherein said second generation means comprises:

means for generating a vector orthogonal to said first vector.

5 53. Apparatus as claimed in claim 50, wherein said second generation means comprises:

means for generating a vector orthogonal to said first vector.

54. Apparatus as claimed in claim 52 or 53, wherein said orthogonal vector is  
10 generated in a predetermined manner.

55. Apparatus as claimed in claim 52 or 53, wherein said orthogonal vector is generated in accordance with a user selected direction.

15 56. Apparatus as claimed in claim 52, wherein the first comparison means further comprises:

means for determining a fifth angle between said first one of said third vectors and said orthogonal vector;

20 means for determining a sixth angle between said other one of said third vectors and said orthogonal vector;

means for comparing said fifth angle with said sixth angle, wherein if said fifth angle is less than said sixth angle then the determined direction of the space curve is in a fifth direction, and if said fifth angle is greater than said sixth angle then the determined direction of the space curve is in a sixth direction, opposite the fifth direction.

25

57. Apparatus as claimed in claim 53, wherein the first comparison means further comprises the following:

means for determining a fourth angle between said third vector and said orthogonal vector;

30 means for comparing said fourth angle with a second threshold value; wherein if said fourth angle is less than said second threshold value then the determined direction of the space curve is in a fourth direction, and if said fourth angle is greater than said second

threshold value then the determined direction of the space curve is in a fifth direction, opposite the fourth direction.

58. Apparatus as claimed in claim 57, wherein said second threshold value is

5 90°.

59. Apparatus as claimed in claim 32, wherein the apparatus comprises means for providing further space curves and performing the operations of the second generation means, first comparison means and orientation means on each space curve.

10

60. Apparatus as claimed in claim 32, wherein the apparatus comprises a plurality of techniques for generating the second vectors and means for selecting one of said techniques in response to user input.

15

61. Apparatus for orientating a finite n-dimensional space curve, wherein the space curve has two endpoints, the apparatus comprising:

means for selecting a desired direction in response to user input;

means for generating a first vector having a direction which is same as the selected desired direction;

20

means for providing a n-dimensional space curve;

means for generating at least one second vector based upon the finite n-dimensional space curve;

means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and

25

means for orientating said finite n-dimensional space curve to the determined direction.

30

62. Apparatus for orientating a character stroke, the apparatus comprising:

means for selecting a desired direction for orientating the character stroke;

means for generating a first vector having a direction which is same as the selected desired direction;



means for generating a space curve representative of the character stroke, wherein the space curve has two;

means for generating two second vectors, each connecting both said endpoints and having opposite directions;

5 means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparison means comprising:

10 means for determining a first angle between one of said two second vectors and said first vector;

means for determining a second angle between the other one of said two second vectors and said first vector; and

15 means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction;

means for orientating said direction of said space curve in accordance with said determined direction; and

20 means for orientating the character stroke in accordance with the direction of the space curve.

63. A computer program product comprising a computer readable medium having a computer program for orientating a space curve, wherein the space curve has two endpoints, the computer program product comprising:

selection means for selecting a desired direction;

first generation means for generating a first vector having a direction which is same as the selected desired direction;

means for providing a space curve;

30 second generation means for generating at least one second vector, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve;

first comparison means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and

5           orientation means for orientating said direction of said space curve in accordance with said determined direction.

64.       A computer program product claimed in claim 63, wherein said second generation means comprises:

10           means for determining said endpoints of said space curve; and  
          means for generating one said second vector connecting both said endpoints.

65.       A computer program product as claimed in claim 63, wherein said second generating means comprises:

15           means for determining said endpoints of said space curve; and  
          means for generating two said second vectors, each connecting both said endpoints and having opposite directions.

66.       A computer program product as claimed in claim 65, wherein said first comparison means comprises:

20           means for determining a first angle between one of said second vectors and said first vector;

          means for determining a second angle between the other one of said second vectors and said first vector;

25           means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction.

30

67.       A computer program product as claimed in claim 64, wherein said first comparison means comprises:

means for determining a first angle between said first vector and said second vector;

means for comparing said first angle with a first threshold value; wherein if said first angle is less than said first threshold value then the determined direction of the space curve is in a first direction, and if said first angle is greater than said first threshold value then the determined direction of the space curve is in a second direction, opposite the first direction.

68. A computer program product as claimed in claim 67, wherein said first threshold value is 90°.

69. A computer program product as claimed in claim 66, wherein said computer program product further comprises means for generating a vector orthogonal to said first vector.

70. A computer program product as claimed in claim 67, wherein said computer program product further comprises means for generating a vector orthogonal to said first vector.

71. A computer program product as claimed in claim 69 or 70, wherein said orthogonal vector is generated in a predetermined manner.

72. A computer program product as claimed in claim 69 or 70, wherein said orthogonal vector is generated in accordance with a user selected direction.

73. A computer program product as claimed in claim 69, wherein the first comparison means further comprises:

means for determining a third angle between one of said second vectors and said orthogonal vector;

means for determining a fourth angle between the other one of said second vectors and said orthogonal vector;

means for comparing said third angle with said fourth angle, wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a

third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

74. A computer program product as claimed in claim 70, wherein the first  
5 comparison means further comprises:

means for determining a second angle between said second vector and said orthogonal vector;

means for comparing said second angle with a second threshold value; wherein if  
said second angle is less than said second threshold value then the determined direction of  
10 the space curve is in a third direction, and if said second angle is greater than said second  
threshold value then the determined direction of the space curve is in a fourth direction,  
opposite the third direction.

75. A computer program product as claimed in claim 74, wherein said second  
15 threshold value is 90°.

76. A computer program product as claimed in claim 63, wherein said second  
generation means comprises:

means for determining endpoints of said curve; and

20 means for generating, at each said endpoint, a said second vector tangent to said  
curve.

77. A computer program product as claimed in claim 76, wherein said first  
comparison means comprises

25 means for determining a first angle between one of said second vectors and said  
first vector;

means for determining a second angle between the other one of said second  
vectors and said first vector;

means for comparing said first angle with said second angle; wherein if said first  
30 angle is less than said second angle then the determined direction of the space curve is in  
a first direction, and if said first angle is greater than said second angle then the  
determined direction of the space curve is in a second direction, opposite the first  
direction.

78. A computer program product as claimed in claim 77, wherein said second generation means comprises:

means for generating one said third vector connecting both said endpoints.

5

79. A computer program product as claimed in claim 77, wherein said second generation means further comprises:

means for generating two said third vectors, each connecting both said endpoints and having opposite directions.

10

80. A computer program product as claimed in claim 79, wherein said first comparison means further comprises:

means for determining a third angle between one of said third vectors and said first vector;

15

means for determining a fourth angle between the other one of said third vectors and said first vector;

means for comparing said third angle with said fourth angle; wherein if said third angle is less than said fourth angle then the determined direction of the space curve is in a third direction, and if said third angle is greater than said fourth angle then the determined direction of the space curve is in a fourth direction, opposite the third direction.

20

81. A computer program product as claimed in claim 78, wherein said first comparison means comprises:

means for determining a third angle between said third vector and said first vector;

25

means for comparing said third angle with a first threshold value; wherein if said third angle is less than said first threshold value then the determined direction of the space curve is in a third direction, and if said third angle is greater than said first threshold value then the determined direction of the space curve is in a fourth direction, opposite the third direction.

30

82. A computer program product as claimed in claim 81, wherein said first threshold value is 90°.

83. A computer program product as claimed in claim 80, wherein said second generation means comprises:

means for generating a vector orthogonal to said first vector.

5

84. A computer program product as claimed in claim 81, wherein said second generation means comprises:

means for generating a vector orthogonal to said first vector.

10 85. A computer program product as claimed in claim 83 or 84, wherein said orthogonal vector is generated in a predetermined manner.

86. A computer program product as claimed in claim 83 or 84, wherein said orthogonal vector is generated in accordance with a user selected direction.

15

87. A computer program product as claimed in claim 83, wherein the first comparison means further comprises:

means for determining a fifth angle between said first one of said third vectors and said orthogonal vector;

20

means for determining a sixth angle between said other one of said third vectors and said orthogonal vector;

means for comparing said fifth angle with said sixth angle, wherein if said fifth angle is less than said sixth angle then the determined direction of the space curve is in a fifth direction, and if said fifth angle is greater than said sixth angle then the determined direction of the space curve is in a sixth direction, opposite the fifth direction.

25

88. A computer program product as claimed in claim 84, wherein the first comparison means further comprises:

means for determining a fourth angle between said third vector and said orthogonal vector;

30

means for comparing said fourth angle with a second threshold value; wherein if said fourth angle is less than said second threshold value then the determined direction of the space curve is in a fourth direction, and if said fourth angle is greater than said second

threshold value then the determined direction of the space curve is in a fifth direction, opposite the fourth direction.

89. A computer program product as claimed in claim 88, wherein said second  
5 threshold value is  $90^\circ$ .

90. A computer program product as claimed in claim 63, wherein the computer  
program product comprises means for providing further space curves and performing the  
operations of the second generation means, first comparison means and orientation means  
10 on each space curve.

91. A computer program product as claimed in claim 63, wherein the computer  
program product comprises a plurality of techniques for generating the second vectors and  
means for selecting one of said techniques in response to user input.

15 ~~92.~~ A computer program product comprising a computer readable medium including  
a computer program for orientating a finite n-dimensional space curve, wherein the space  
curve has two endpoints, the computer program product comprising:

20 means for selecting a desired direction in response to user input;  
means for generating a first vector having a direction which is same as the  
selected desired direction;

means for providing a n-dimensional space curve;  
means for generating at least one second vector based upon the finite n-  
dimensional space curve;

25 means for comparing the first and second vectors so as to determine a direction  
of said space curve, wherein said determined direction of said space curve is along said  
curve from a first said endpoint to a second said endpoint and which is closest to said  
selected desired direction; and

30 means for orientating said finite n-dimensional space curve to the determined  
direction.

93. A computer program product comprising a computer readable medium including a computer program for orientating a character stroke, the computer program product comprising:

means for selecting a desired direction for orientating the character stroke;

5 means for generating a first vector having a direction which is same as the selected desired direction;

means for generating a space curve representative of the character stroke, wherein the space curve has two endpoints,

10 means for generating two second vectors, each connecting both said endpoints and having opposite directions;

means for comparing the first and second vectors so as to determine a direction of said space curve, wherein said determined direction of said space curve is along said curve from a first said endpoint to a second said endpoint and which is closest to said selected desired direction; and wherein said comparison means comprises:

15 means for determining a first angle between one of said two second vectors and said first vector;

means for determining a second angle between the other one of said two second vectors and said first vector; and

20 means for comparing said first angle with said second angle; wherein if said first angle is less than said second angle then the determined direction of the space curve is in a first direction, and if said first angle is greater than said second angle then the determined direction of the space curve is in a second direction, opposite the first direction;

25 means for orientating said direction of said space curve in accordance with said determined direction; and

means for orientating the character stroke in accordance with the direction of the space curve.



## METHOD AND APPARATUS FOR ORIENTATING A CHARACTER STROKE

Disclosed is a method of orientating a space curve having two endpoints. The method comprises selecting a desired direction and then generating a first vector having a direction which is same as the selected desired direction. At least one second vector is then generated, each said second vector having a corresponding direction indicative of a corresponding characteristic of the space curve. The first and second vectors are compared so as to determine a direction of the space curve, wherein the determined direction of the space curve is along the curve from the first endpoint to the second endpoint and which is closest to the selected desired direction. The direction of the space curve is then oriented in accordance with the determined direction.

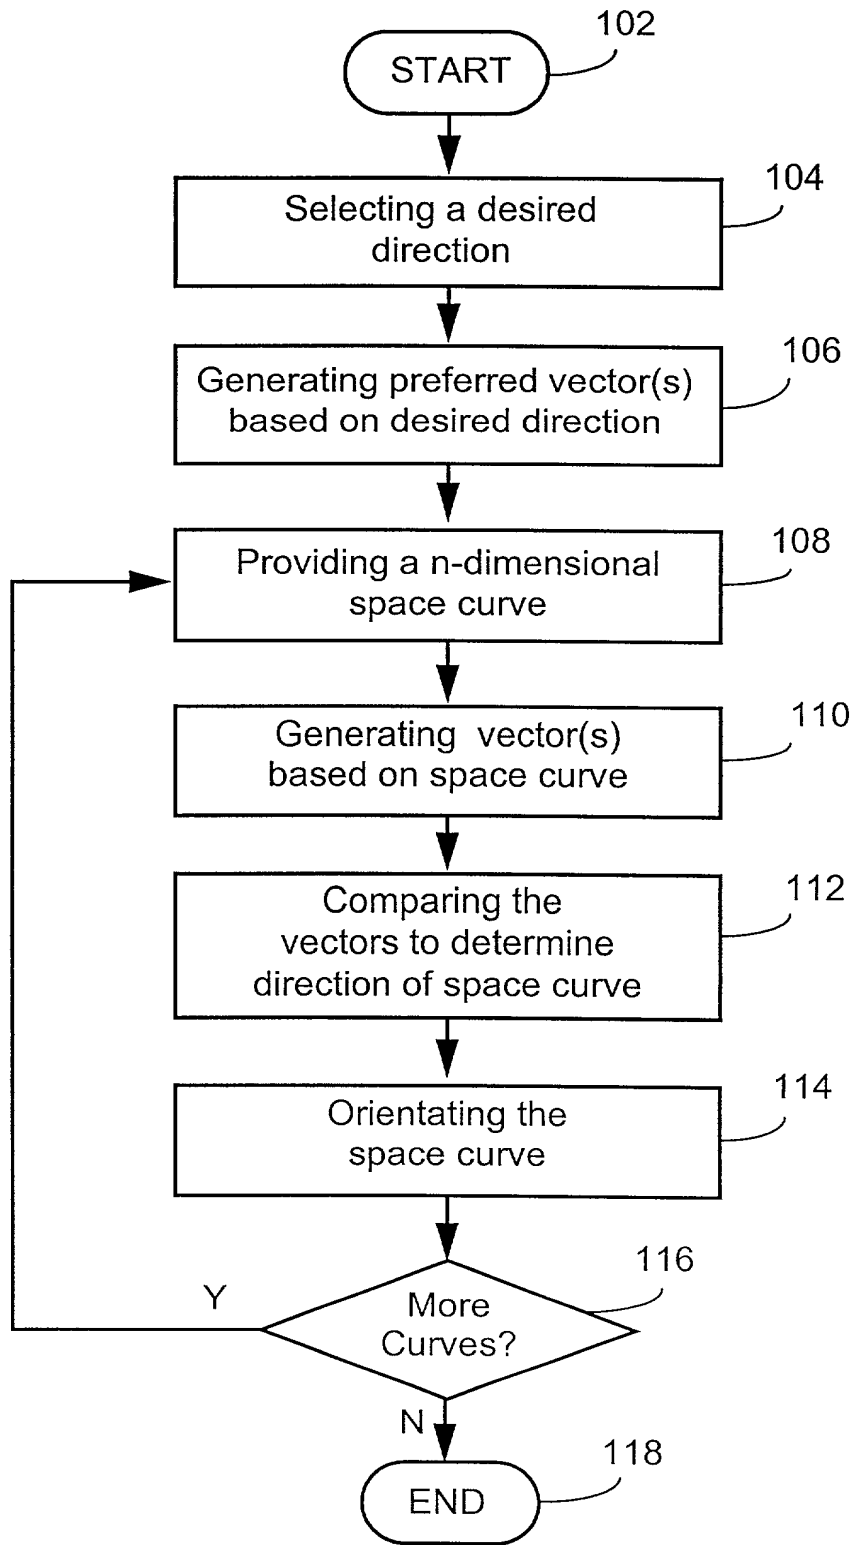


Fig. 1

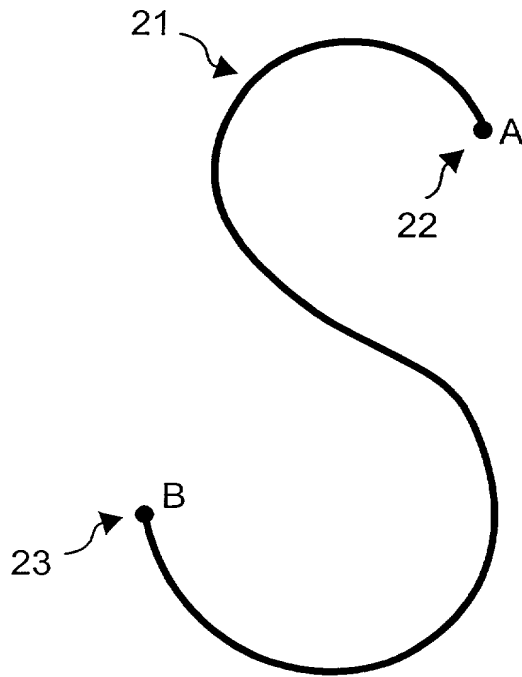


Fig. 2

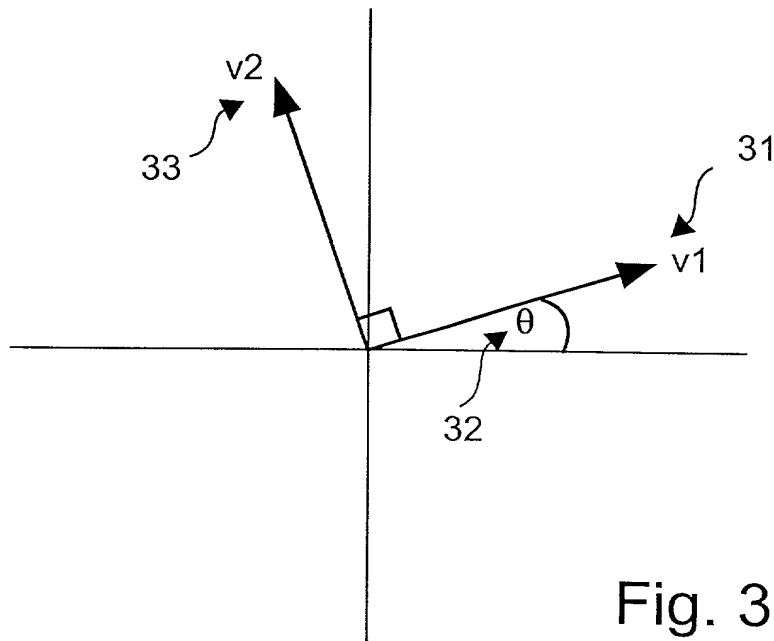


Fig. 3

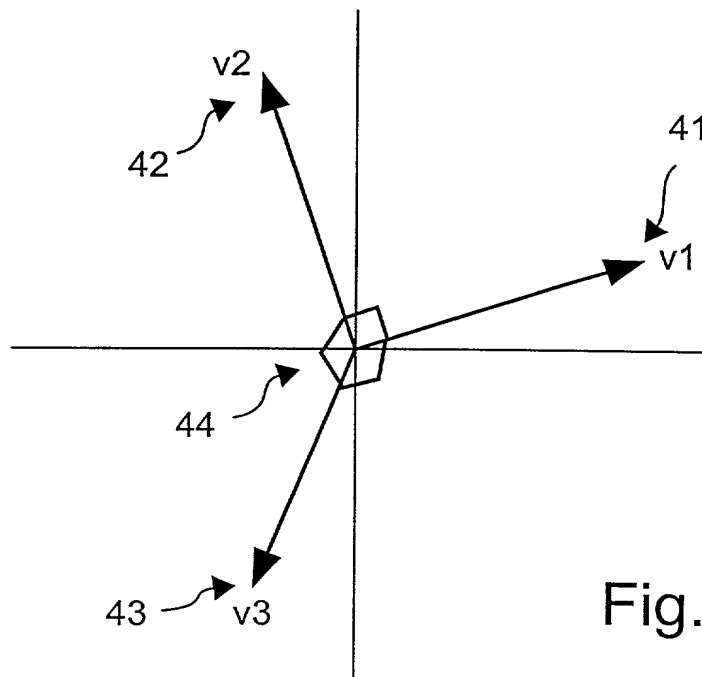


Fig. 4

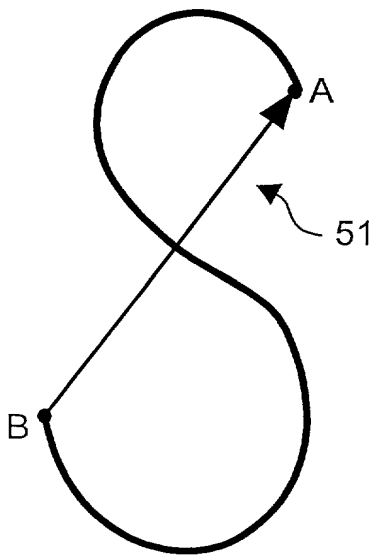


Fig. 5A

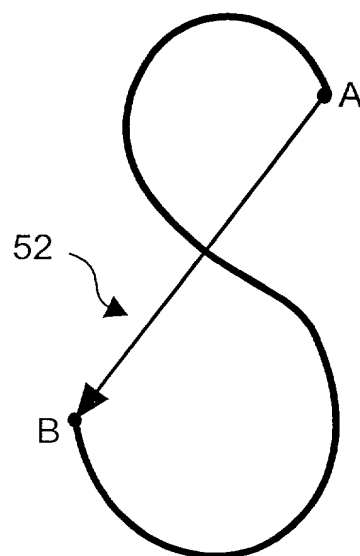


Fig. 5B

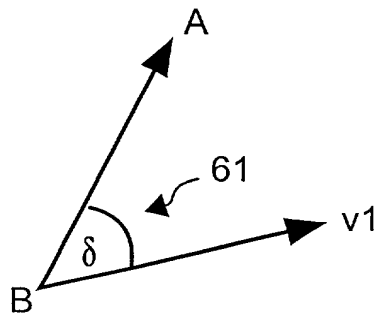


Fig. 6A

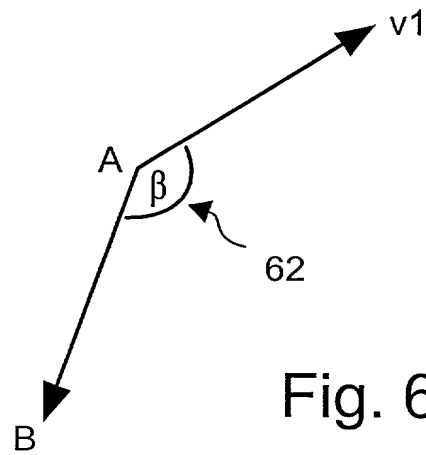


Fig. 6B

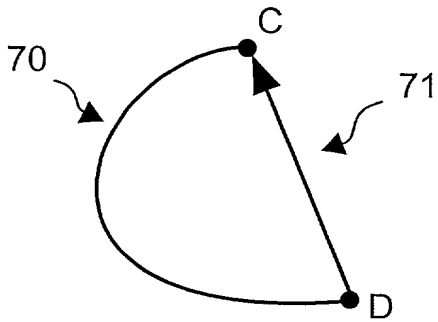


Fig. 7A

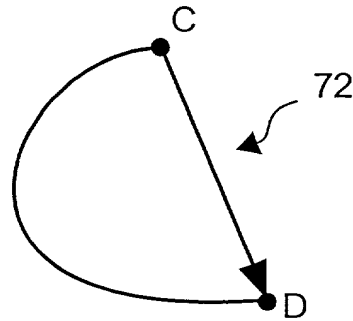


Fig. 7B




Fig. 7C

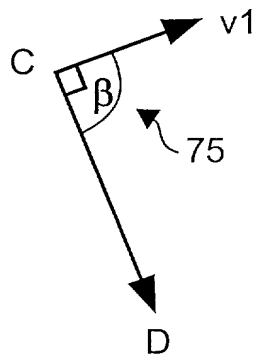


Fig. 7D

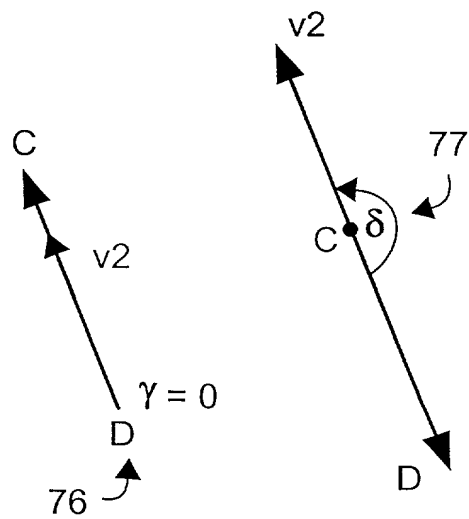


Fig. 7E

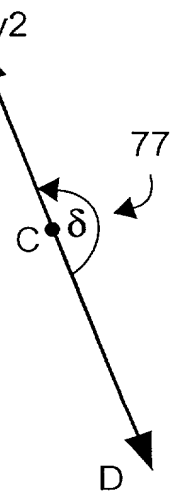


Fig. 7F

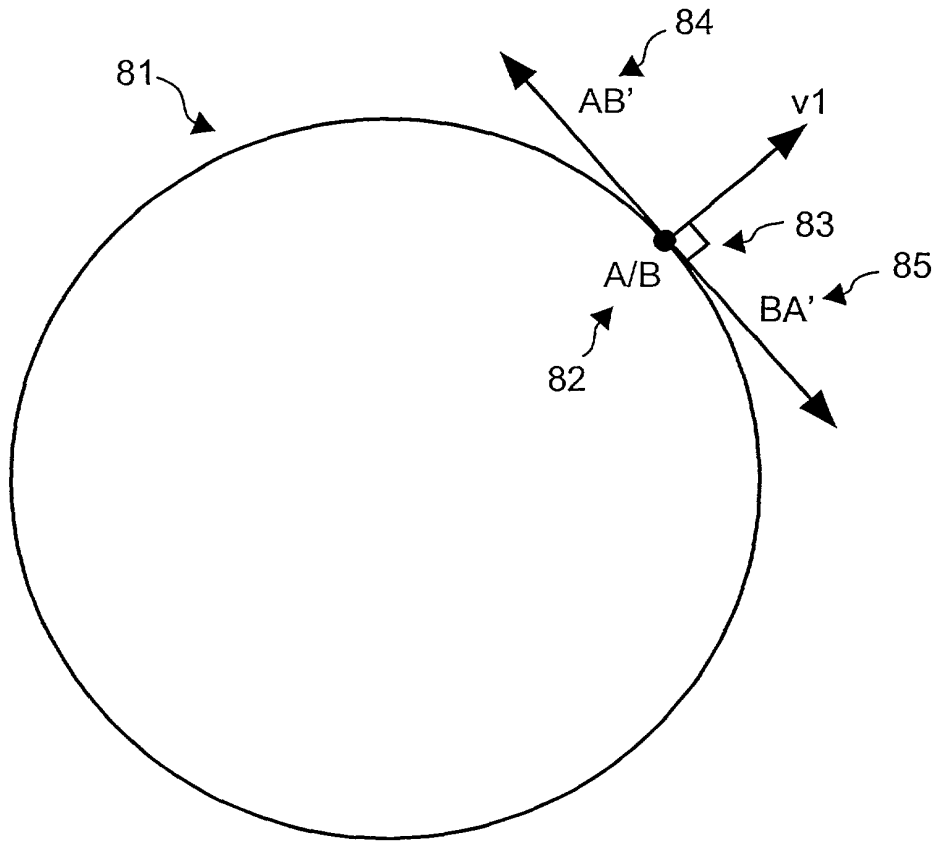
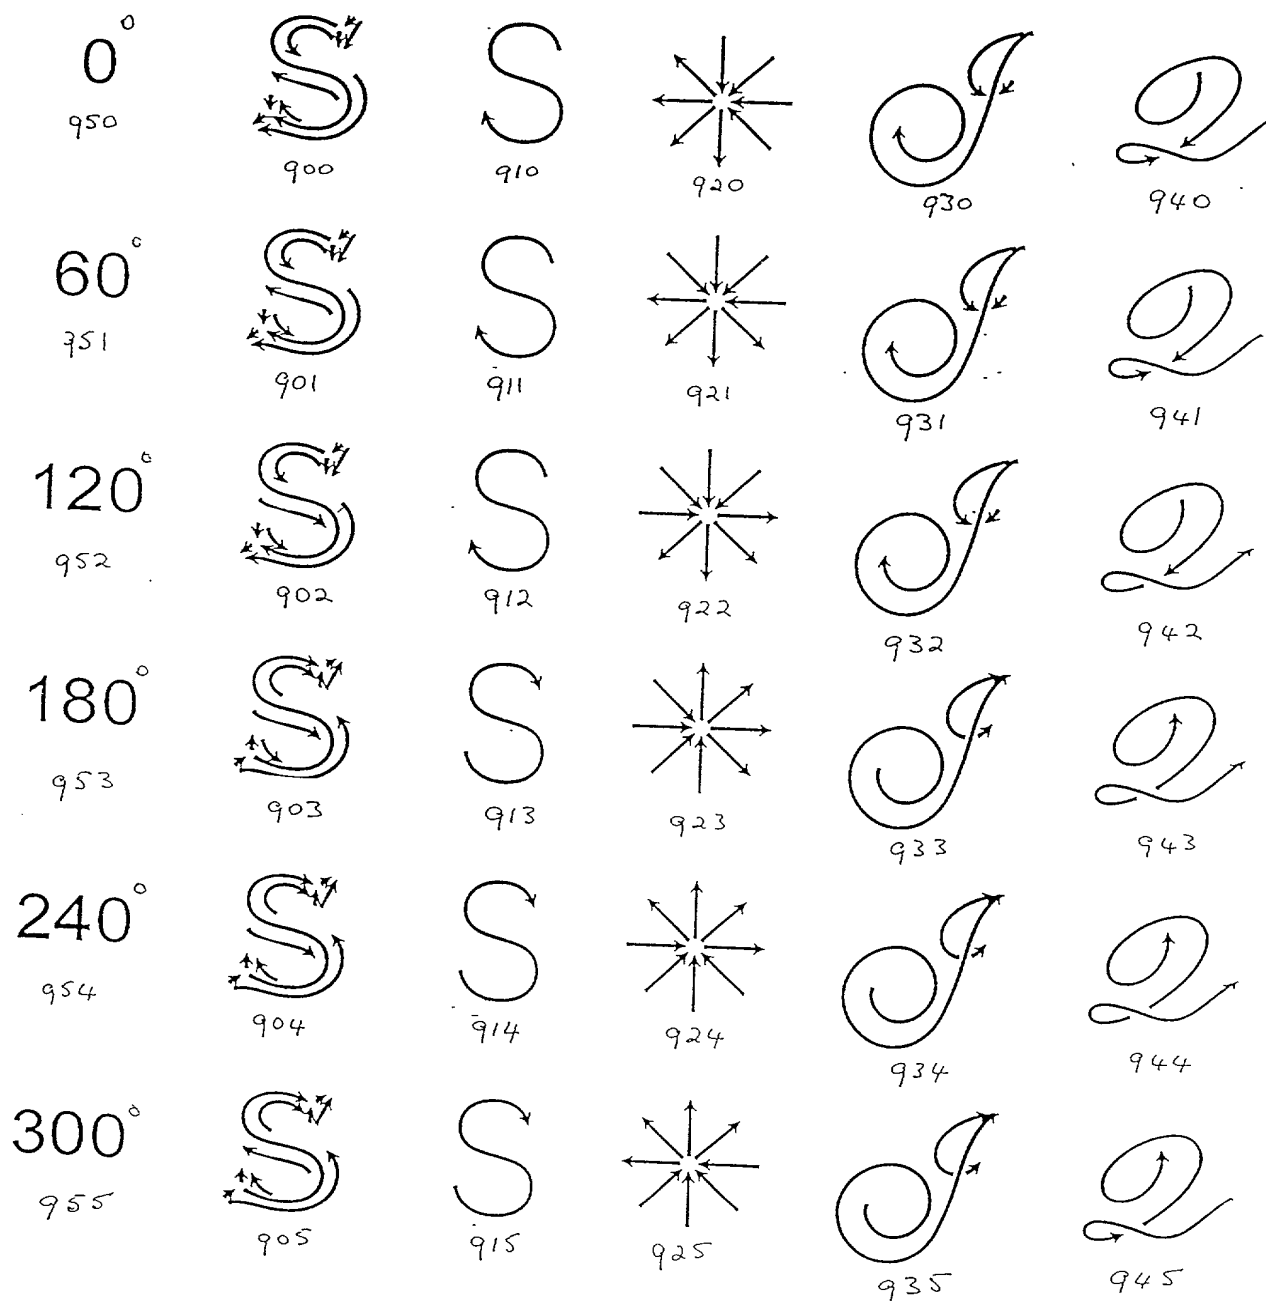


Fig. 8

Fig. 9



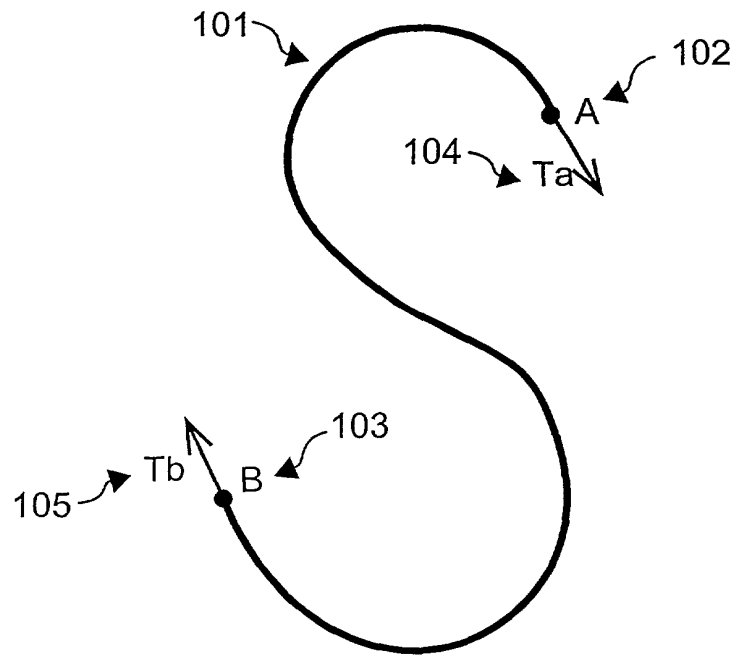


Fig. 10

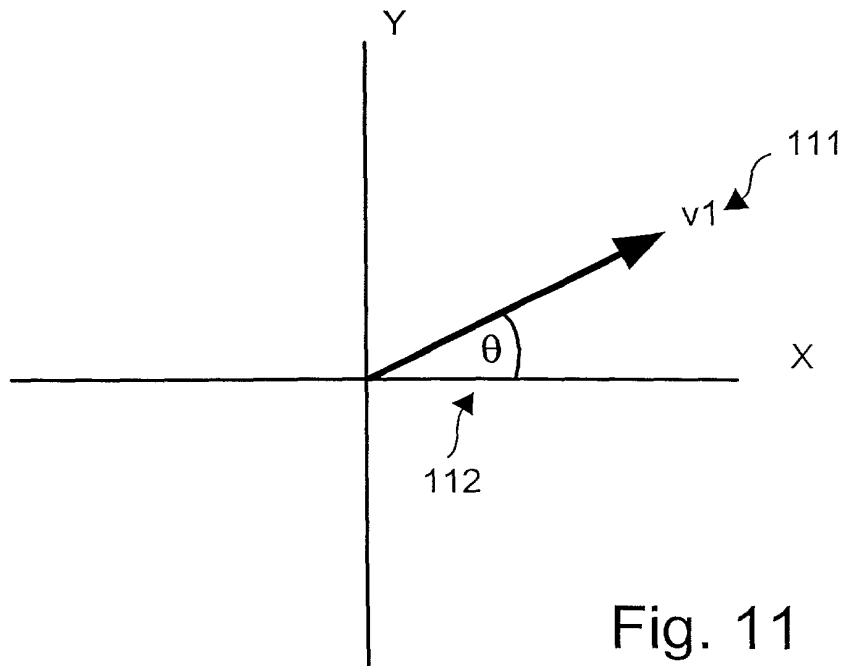


Fig. 11



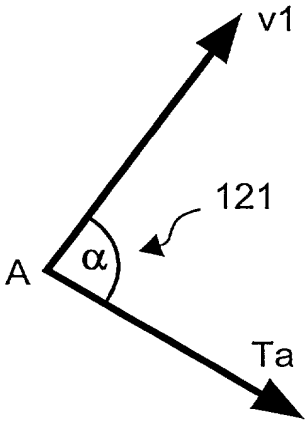


Fig. 12A

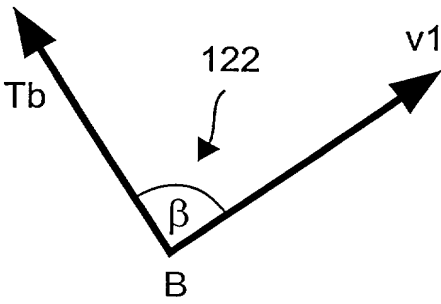


Fig. 12B

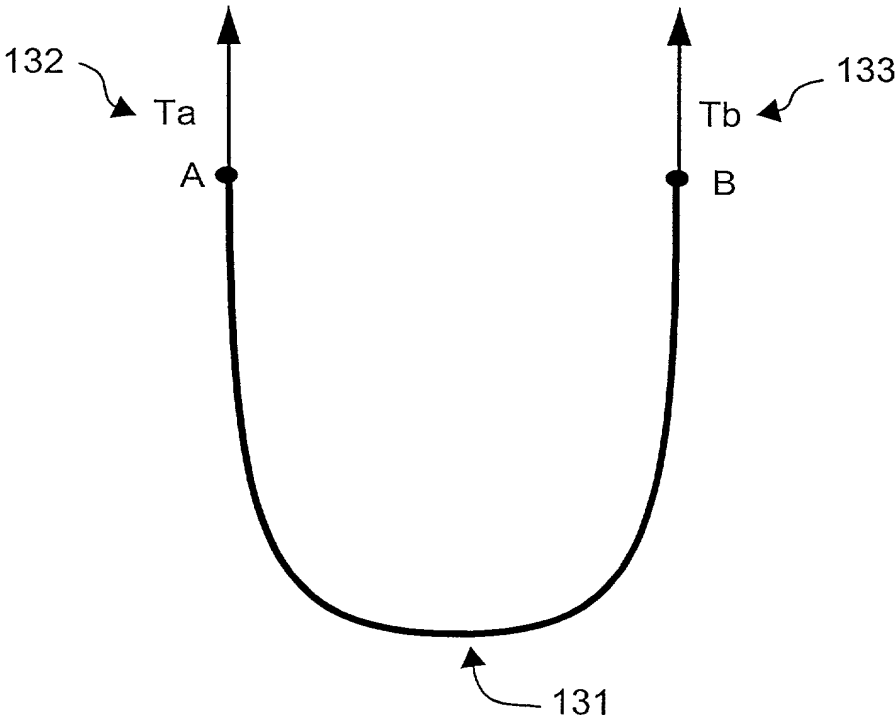


Fig. 13

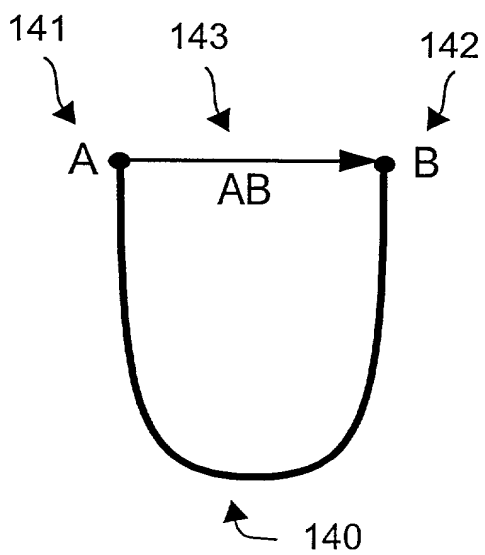


Fig. 14A

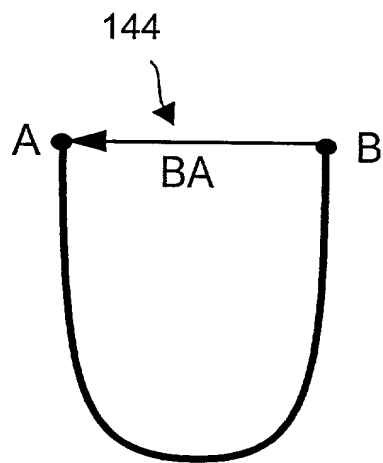


Fig. 14B

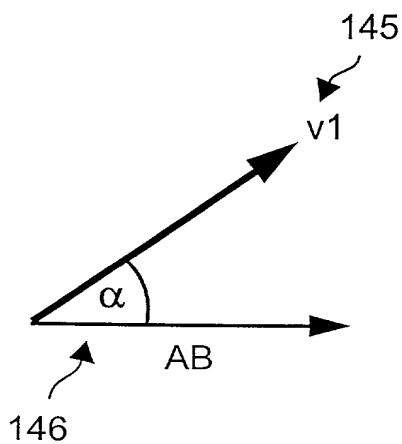


Fig. 14C

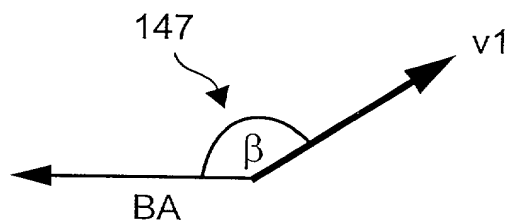


Fig. 14D

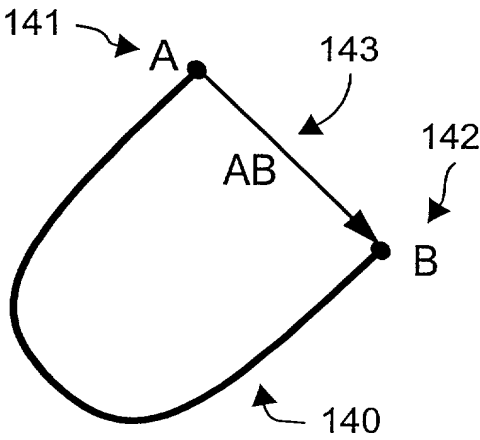


Fig. 15A

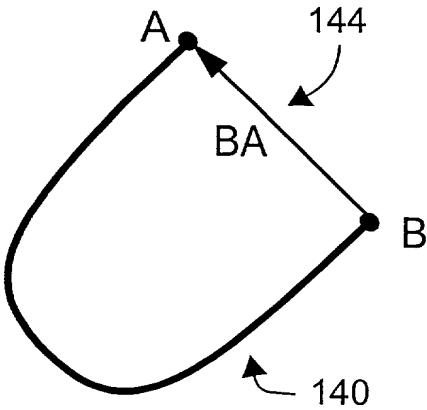


Fig. 15B

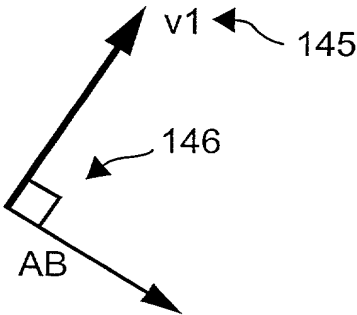


Fig. 15C

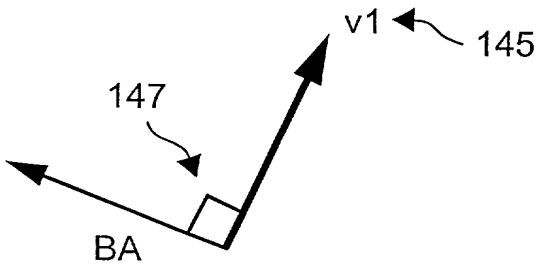


Fig. 15D

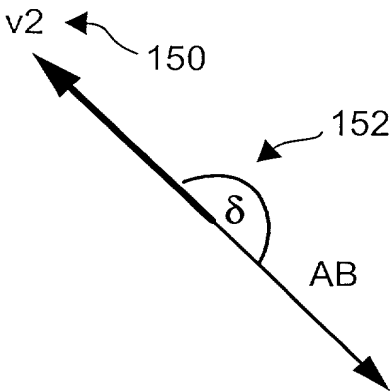


Fig. 15E




Fig. 15F

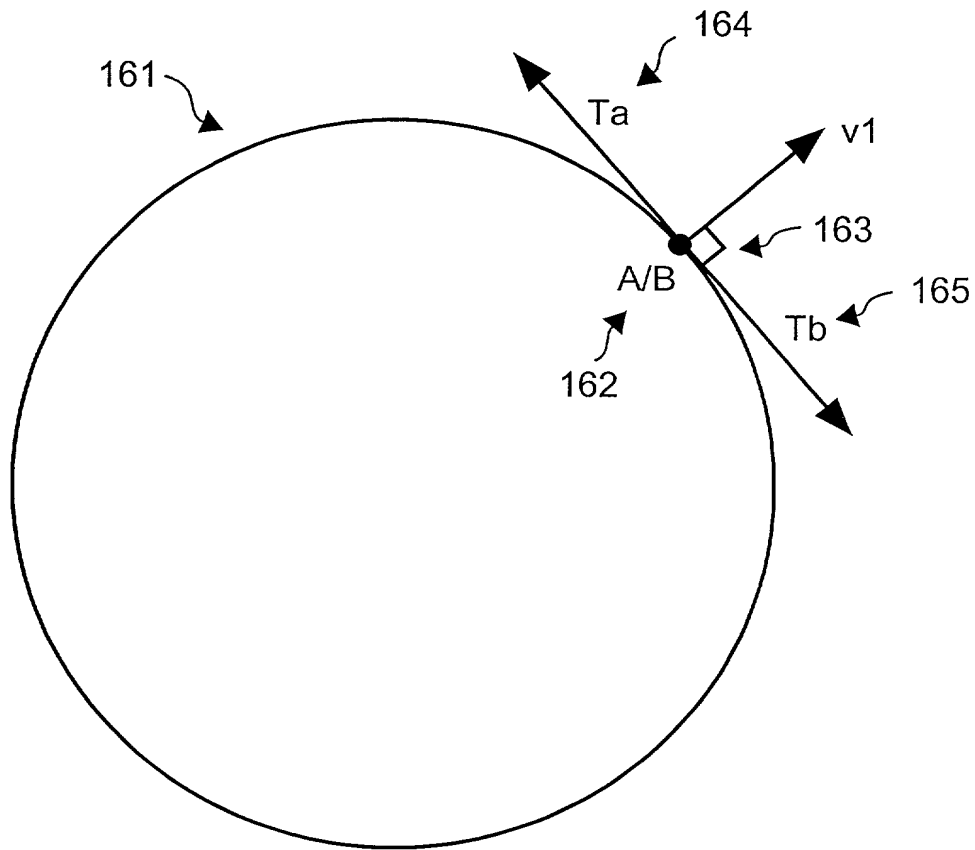


Fig. 16

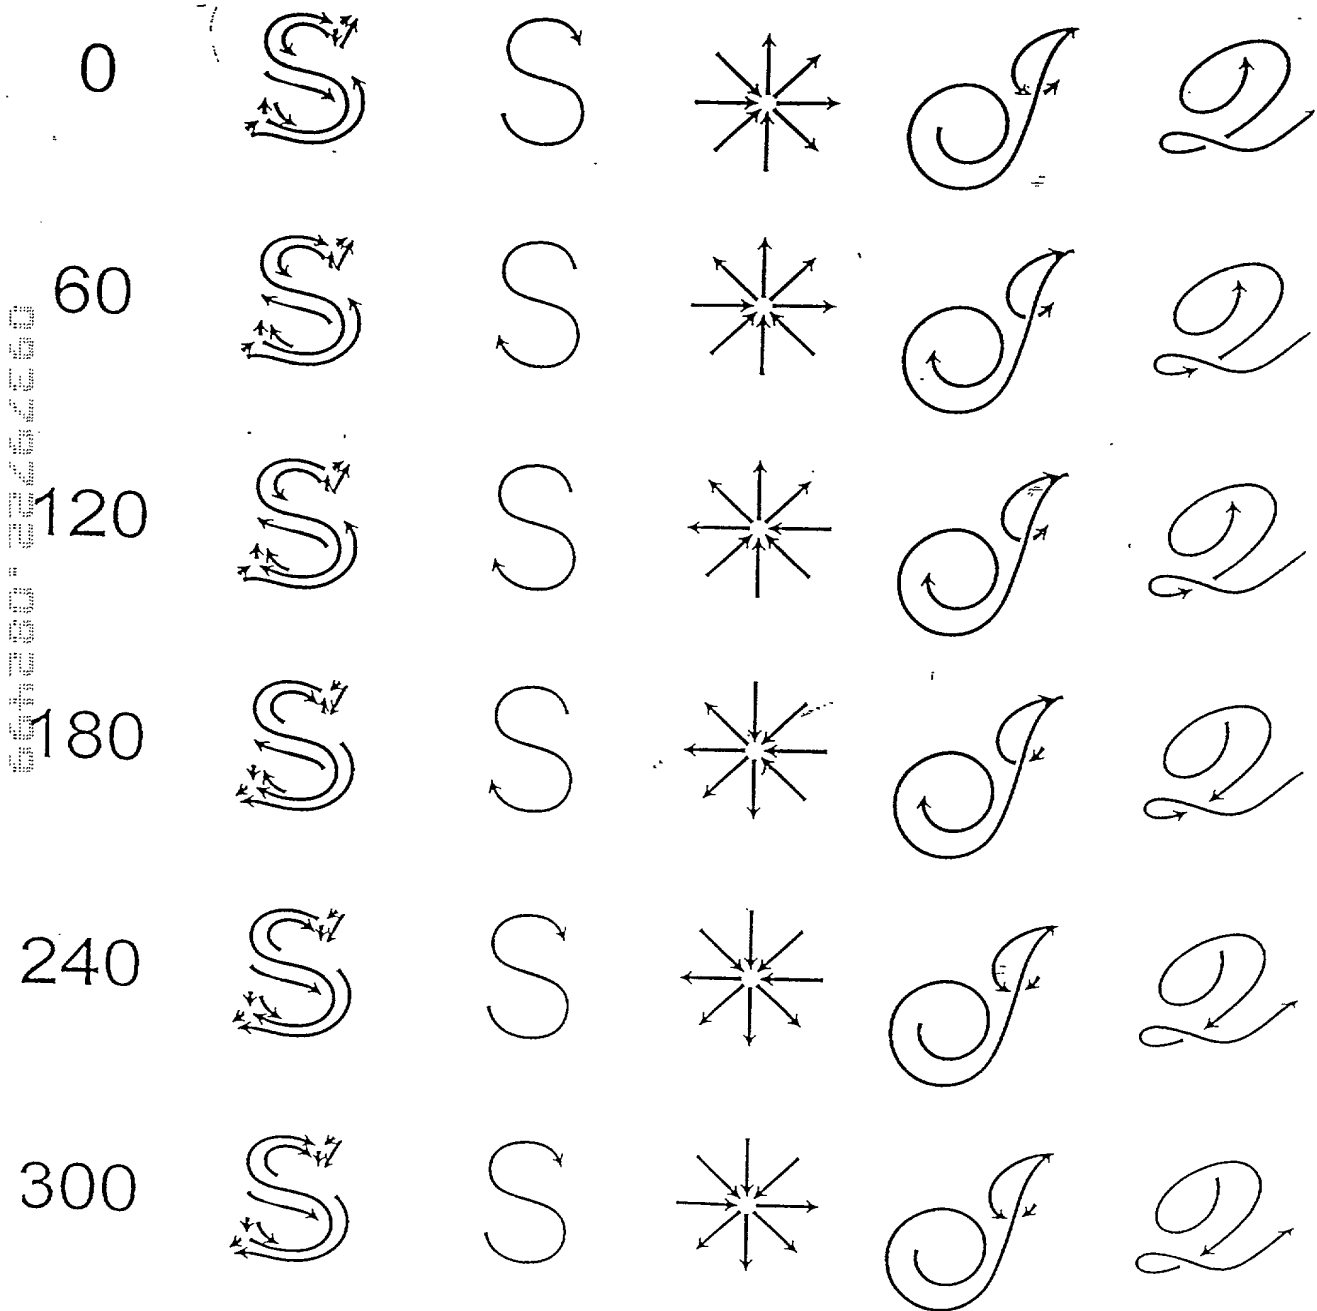


Fig. 17

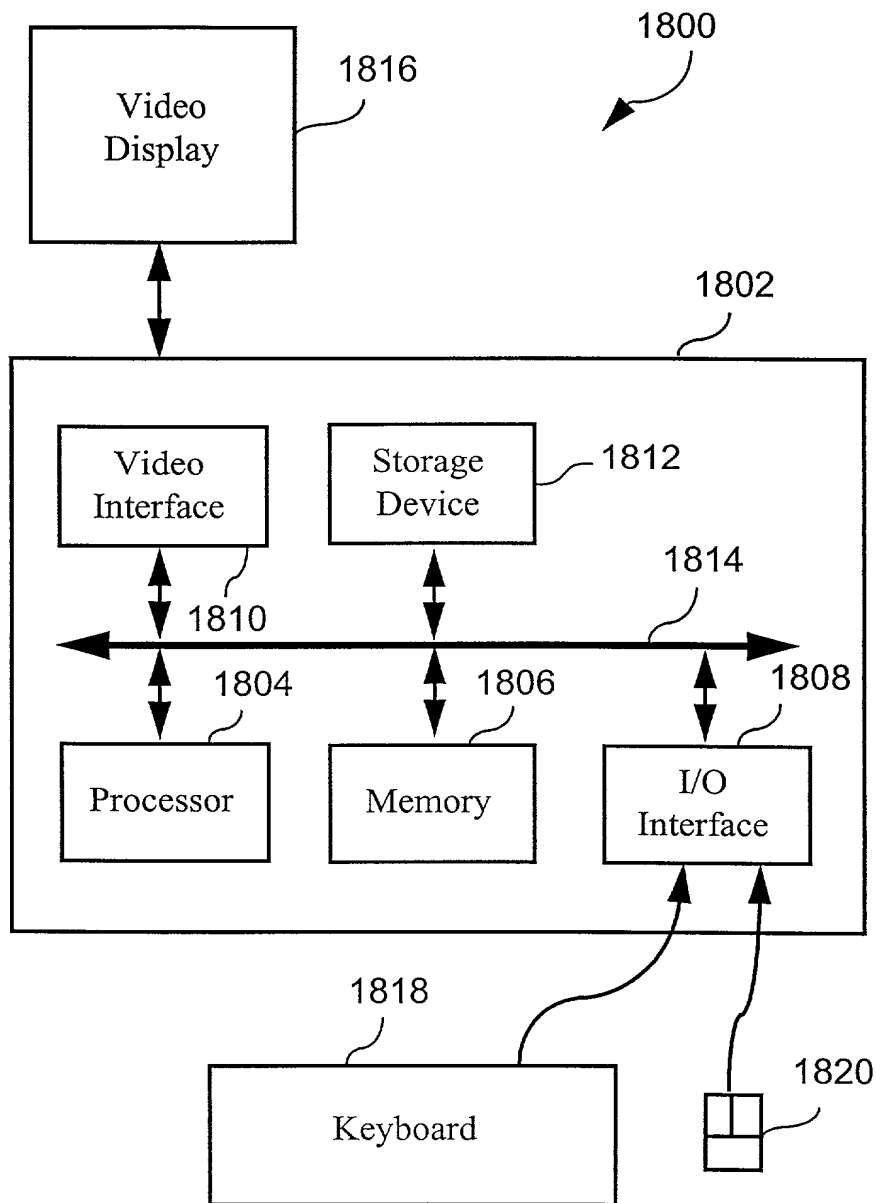


Fig. 18

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION  
(Page 1)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled \_\_\_\_\_

METHOD AND APPARATUS FOR ORIENTATING A CHARACTER STROKE

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No) Priority Claimed</u>
Australian	PP5578	28 August 1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>Status (Patented, Pending, Abandoned)</u>
------------------------	----------------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO  
Customer Number: 05514**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor CAMERON BOLITHO BROWNE

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of Australia

Residence 75 George Street, Burleigh Heads, Queensland 4221  
Australia

Post Office Address c/o Canon Kabushiki Kaisha

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

(Page 2)

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

[illegible]